Uncertainty Modeling for Robust Optimization

Martin Fuchs

CERFACS, Toulouse, France

May 17, 2011

Motivation

Challenges in real-life applications include:

- handling of uncertain parameters
  - $\longrightarrow$ incomplete information
  - $\longrightarrow$ high-dimensional uncertainties
- robust optimization
  - $\longrightarrow$ bilevel formulation
  - $\longrightarrow$ extra effort to account for robustness
  - $\longrightarrow$ black box objective functions

1. Robust optimization
2. Potential clouds
3. Worst-case search
4. Applications
5. Summary

1 Robust optimization

2 Potential clouds

3 Worst-case search

4 Applications

5 Summary

Problem formulation

$$\min_{\theta \in \mathbf{T}} \max_{\varepsilon \in \mathcal{C}} g(\theta, \varepsilon) \tag{1}$$

- bilevel problem
- $\varepsilon \in \mathcal{C} \subseteq \mathbb{R}^n$ represents the uncertainties
- search space $\mathbf{T}$, typically a hyperinterval, possibly mixed integer variables
- black box objective function $g : \mathbf{T} \times \mathcal{C} \to \mathbb{R}$

Reformulation

Reformulate as two nested 1-level problems:

- outer level problem

$$\min_{\theta \in \mathbf{T}} \ \widehat{g}(\theta), \tag{2}$$

and the

- inner level problem

$$\widehat{g}(\theta) := \max_{\varepsilon \in \mathcal{C}} \ g(\theta, \varepsilon), \tag{3}$$

$\longrightarrow$ **worst-case search**

$\longrightarrow$ uncertainty modeling

1 Robust optimization

2 Potential clouds

3 Worst-case search

4 Applications

5 Summary

Potential clouds

- n-dimensional random vector ε
- potential function $V : \mathbb{R}^n \to \mathbb{R}$

Construct

- lower α-cut $\underline{C}_\alpha := \{x \in \mathbb{R}^n \mid V(x) \leq \underline{V}_\alpha\}$
  contains at most a fraction of α of all possible scenarios
- upper α-cut $\overline{C}_\alpha := \{x \in \mathbb{R}^n \mid V(x) \leq \overline{V}_\alpha\}$
  contains at least a fraction of α of all possible scenarios

$\Rightarrow$ nested regions defining a **potential cloud**

How?

- regard $V(\varepsilon)$ as a 1-dimensional random variable
- find an enclosure of the CDF of $V(\varepsilon)$ (p-box)

Example

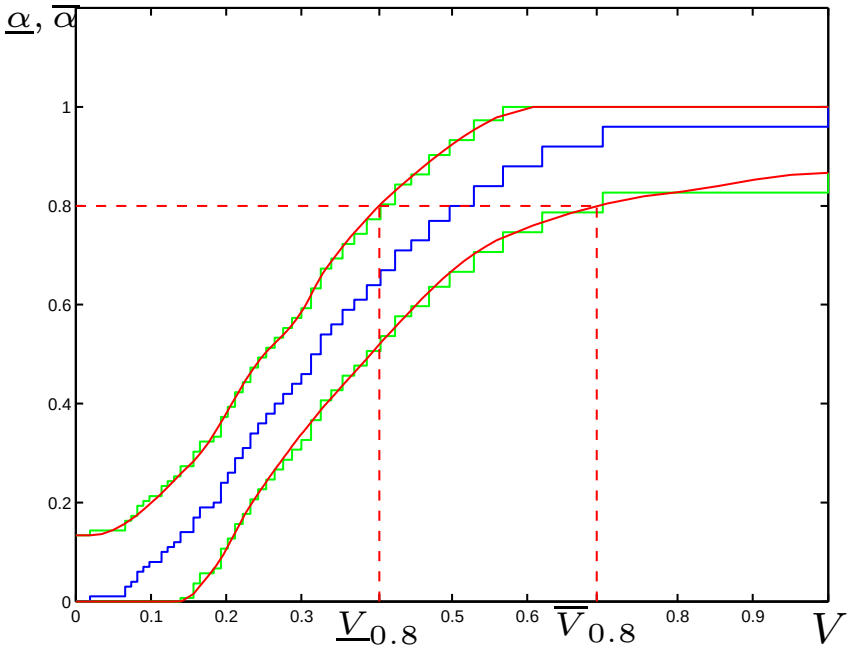

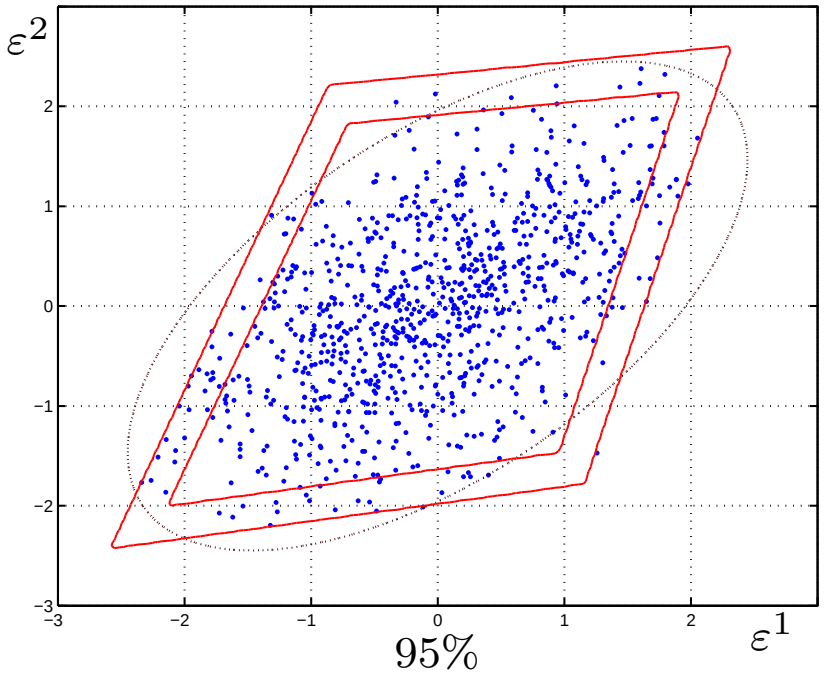

- level sets of V chosen polyhedral shaped
- α-cuts reasonably approximate the confidence regions linearly

1 Robust optimization

2 Potential clouds

3 Worst-case search

4 Applications

5 Summary

Challenges

The worst-case search is a 1-level problem for fixed $\theta \in \mathbf{T}$ and $f(\varepsilon) := g(\theta, \varepsilon)$:

$$\max_{\varepsilon \in \mathcal{C}} \; f(\varepsilon). \tag{4}$$

- replaces nominal objective function of the non-robust formulation

$\longrightarrow$ produces overhead of treating uncertainties

- g can be computationally expensive, ε can be high-dimensional

$\longrightarrow$ worst-case search can be prohibitively expensive

$\Rightarrow$ speed-up required

Polyhedral uncertainty

- $\mathcal{C} := \{\varepsilon \mid A(\varepsilon - m) \leq b\}$, a polyhedral α-cut

$\Rightarrow$ worst-case search turns into

$$\begin{aligned} \max_{\varepsilon} \;\; & f(\varepsilon) \\ \text{s.t.} \;\; & A(\varepsilon - m) \leq b. \end{aligned} \tag{5}$$

- classical approach: linearize f and solve LP
- simulation based approach for bound constraints $\varepsilon \in b_0$ and linear f: **Cauchy deviates method**

$$\begin{aligned} & [\min_{\varepsilon} f(\varepsilon), \max_{\varepsilon} f(\varepsilon)] \\ & \text{s.t.} \;\; \varepsilon \in [b_c - b_r, b_c + b_r]. \end{aligned} \tag{6}$$

Modified Cauchy deviates method

1. evaluation at center
   - compute $f(m)$
2. sample $\mathcal{C}$ uniformly
   - rejection step
3. transformation to Cauchy distribution via inverse Cauchy CDF with parameter b_r^i
   - Cauchy distributed sample point x_i possibly outside $\{\mathcal{C} - m\}$
4. normalization step
   - $K_i = \max\left(\frac{Ax_i}{b}\right) \Rightarrow \frac{x_i}{K_i} \in \{\mathcal{C} - m\}$
5. simulated deviation
   - $\delta_i = K_i(f_i - f(m))$, with $f_i := f\left(\frac{x_i}{K} + m\right)$
6. thus generate N sample points $\delta_1, \ldots, \delta_N$

Approximation

Let $f(m+\delta) = f(m) + c^T\delta$, c unknown

$$\Rightarrow \begin{cases} 1. & \max\limits_{\delta\in[-b_r,b_r]} f(m+\delta) = f(m) + b_r^T|c|, \\ 2. & \delta_i = c^T x_i \\ & \longrightarrow \delta_i \text{ is Cauchy dist. with parameter } b_r^T|c| \end{cases}$$

$\Rightarrow$ use the generated sample to estimate the solution statistically

Estimation

$\longrightarrow$ estimate the deviation Δ from $f(m)$ via max-likelihood using $\delta_1, \ldots, \delta_N$

$\longrightarrow$ approximate solution

$$\max_{\varepsilon \in \mathcal{C}} \; f(\varepsilon) \approx f(m) + \Delta \tag{7}$$

- tractable estimation error even for very small N, useful if linearization cannot be afforded

N	800	200	100	50	20	10	5
error	10%	20%	30%	40%	70%	110%	200%

- can be easily parallelized

1 Robust optimization

2 Potential clouds

3 Worst-case search

4 Applications

5 Summary

Mars Exploration Rover (MER) – ADCS Subsystem

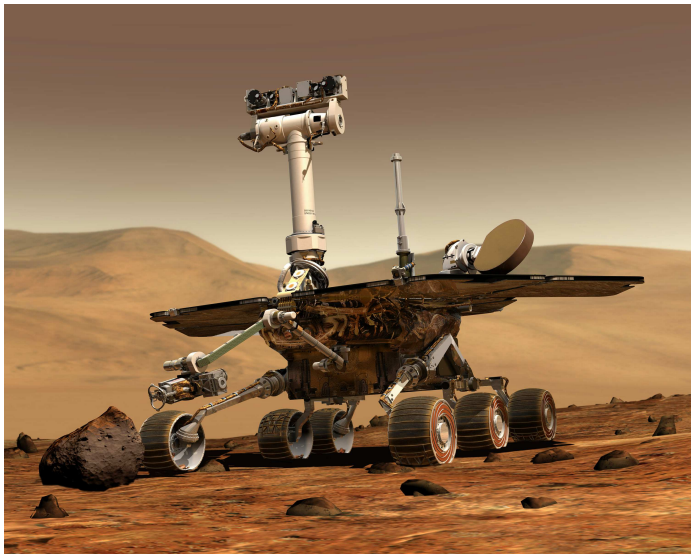

- **A**ttitude **D**etermination and **C**ontrol **S**ystem (**ADCS**)
- 1-dimensional design problem, 30 choices
- complex uncertainty info, 34 dimensions

XEUS mission – permanent space-borne X-ray observatory

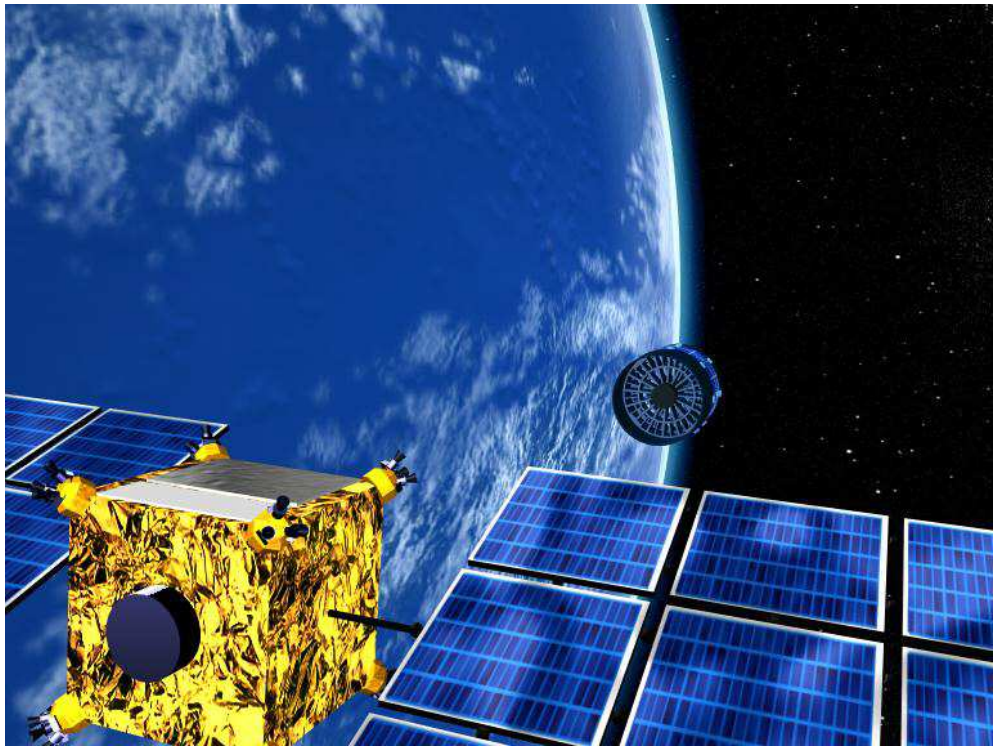

- complex design problem, 10 dimensions, $4 \times 14 \times 6 \times 8 \times 5 \times 20 \times 9 \times 44 \times 30 \geq 3 \cdot 10^9$ discrete choices, 1 continuous choice variable
- box uncertainty, 24 dimensions

Results

Number of simulation based worst-case estimations within close range (70% error) of linearization based worst-case searches:

	number of estimations	**close results**	**percentage**
MER	400	380	95.0%
XEUS	6204	5913	95.3%

Number of solutions close to the classical robust optimal solution with respect to different tolerances ($\mathrm{sub} := \frac{\widehat{g}(\widehat{\theta})-\widehat{g}(\widehat{\theta}_{\mathrm{lin}})}{|\widehat{g}(\widehat{\theta}_{\mathrm{lin}})|}$):

	# opt. runs	$\mathrm{sub} = 0$	$\mathrm{sub} \leq 5\%$	$\mathrm{sub} \leq 10\%$	**average** sub
MER	10	1	1	8	7.6%
XEUS	10	0	10	10	2.4%

1 Robust optimization

2 Potential clouds

3 Worst-case search

4 Applications

5 Summary

Summary

- polyhedral clouds capture and process the uncertainty information available
- we embed clouds as the worst-case search in robust optimization
- high-dimensional worst-case search benefits from simulation based speed-up

Visit my website: `http://www.martin-fuchs.net`